

**Prysmian**  
Group  
**INSTALLATION INSTRUCTION**

**OAsys® INTERNAL PLANT  
OCR Sub Rack**

**Component Parts (pictures not to scale)**

**1. OCR Sub Rack Assembly Qty 1**




**2. OCR Sub Rack Kit – Contents:**

- 36 x Hydra Fibre Storage Reels.
- 1 x Fibre Guide Pin.

## MOUNTING THE SHELF TO THE RACK


### Step 1

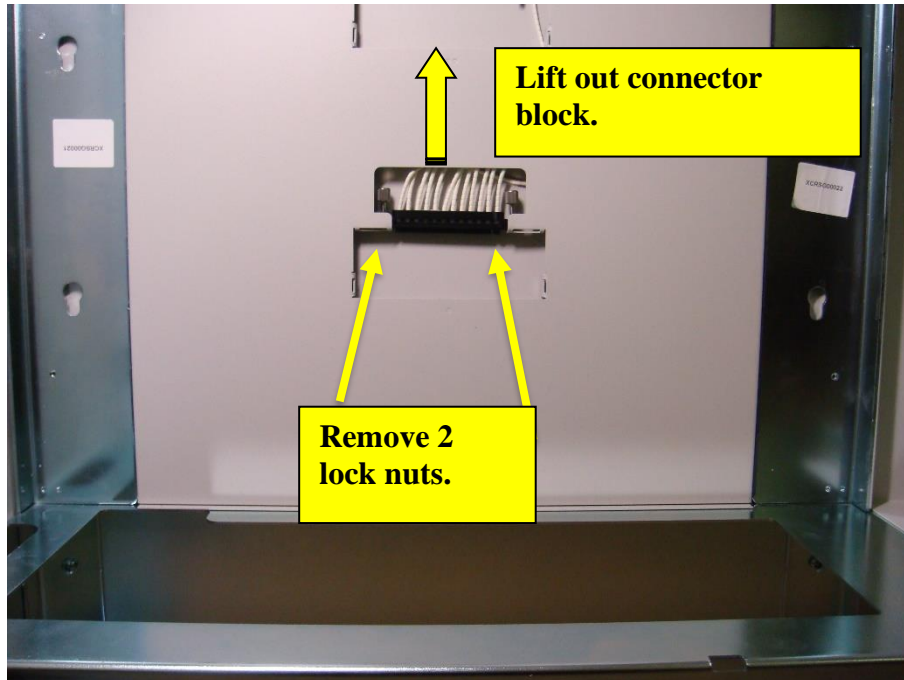

- Remove 2 lock nuts from male connector block on rear panel and lift connector block from its temporary locating holes in rear panel.

## MOUNTING THE SHELF TO THE RACK

### Step 2

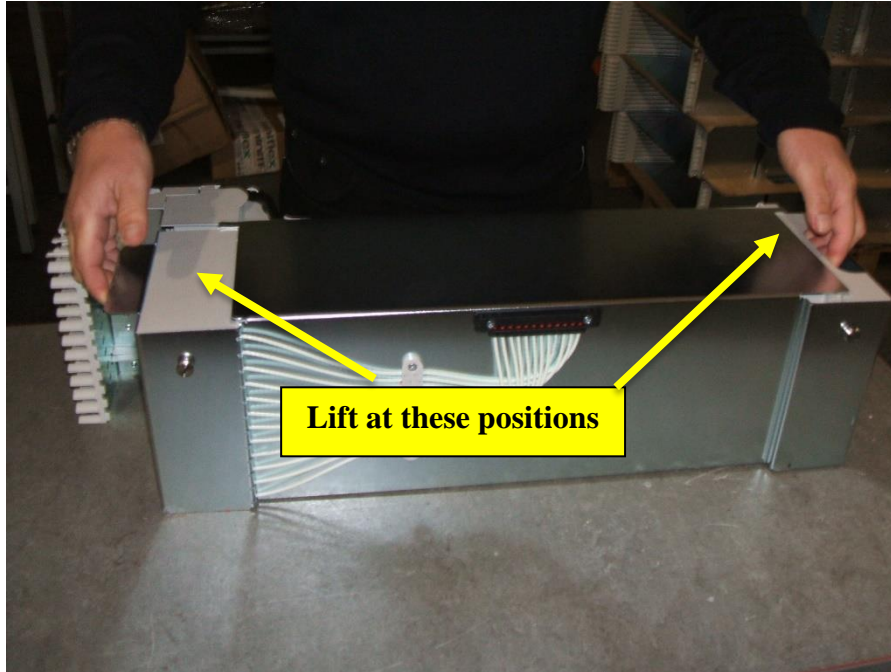

- Remove OCR Sub Rack Assembly **(1)** from packaging, using lifting positions as indicated.

## MOUNTING THE SHELF TO THE RACK


**Step 3**



- Move Sub Rack Assembly into position in OCR Rack.

## MOUNTING THE SHELF TO THE RACK

### Step 4

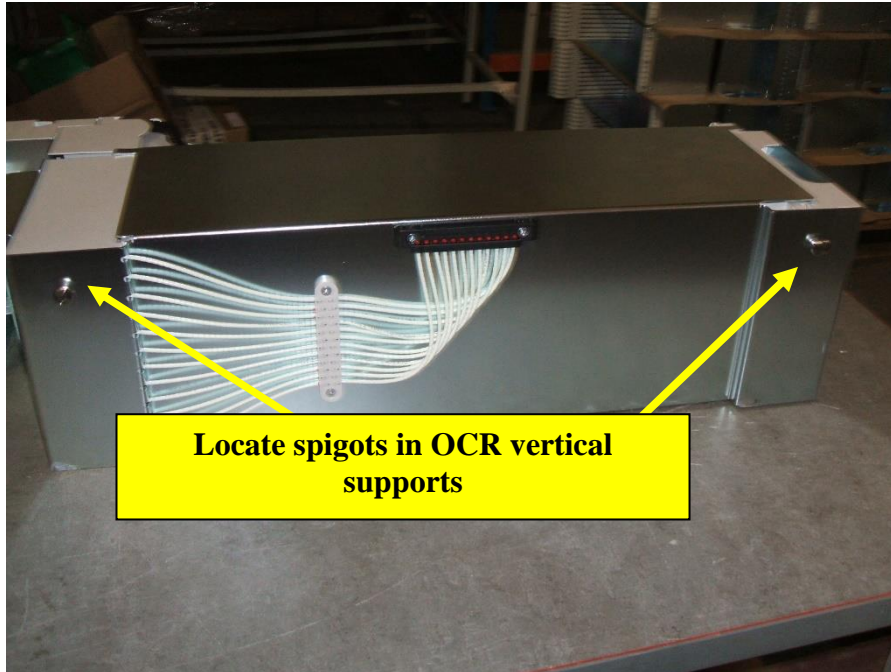

- Locate the 2 spigots on the rear of the Sub Rack into the keyhole slots in the OCR rack left and right-hand vertical supports.

## MOUNTING THE SHELF TO THE RACK

### Step 5



- Insert Male Connector block from rear panel of OCR Rack into the Female Connector on the Sub Rack. Fully tighten the 2 thumb screws to lock the connectors together. Installation of the sub rack is now complete.



### **Warning:**


**Sub-Rack's MUST be fitted in sequence from lowest position upwards.**

## MOUNTING THE SHELF TO THE RACK


### Step 6



**A**

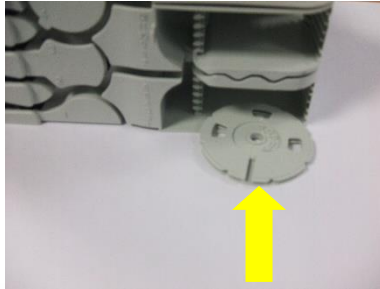

**B**

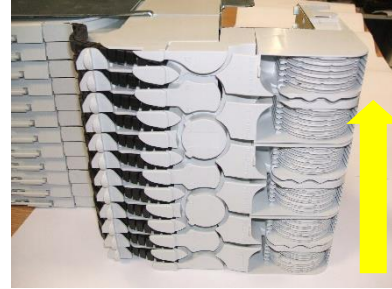

**C**



Hydra Storage Reels must be installed with the word  
“**TOP**” and direction arrow facing upwards.

- Select one of the 36, Hydra Fibre Storage Reels from the OCR Sub Rack Kit (2) as illustrated in 6A, above.
- Push the Hydra Fibre Storage Reel into the first available reel storage slot as indicated by the arrow in 6B, above.
- Continue inserting the Hydra Fibre Storage Reels into each slot until all 36, reels have been located into the sub rack hydra fibre management area, as illustrated in 6C above.