

### STRIPPING TOOL PREPARATION:

THE STRIPPING TOOL CAN BE USED ON 8,5mm; 12mm AND 14,5mm OD PRYSMIAN CABLES WITH GRP STRENGTH MEMBERS.

NOTE: THE TOOL IS NOT TO BE USED TO STRIP CABLES WITHOUT THE GRP STRENGTH MEMBERS EMBEDDED IN THE SHEATH.

THE STRIPPING TOOL IS SUPPLIED ALREADY EQUIPPED TO BE USED ON A 12mm OD PRYSMIAN CABLE.

CHECK THE CABLE TYPE USED.

IF NEEDED USE A STAR SCREWDRIVER TO REMOVE THE SCREW ON TOP OF THE STRIPPING TOOL BODY TO RELEASE THE ADAPTOR MARKED "2"

FOR A 14,5mm OD CABLE:


THE STRIPPING TOOL IS USED WITHOUT ADAPTOR.

FOR A 8,5mm OD CABLE:

REPLACE THE ADAPTOR MARKED "2" BY THE ADAPTOR MARKED "1"

Page 1 of 7



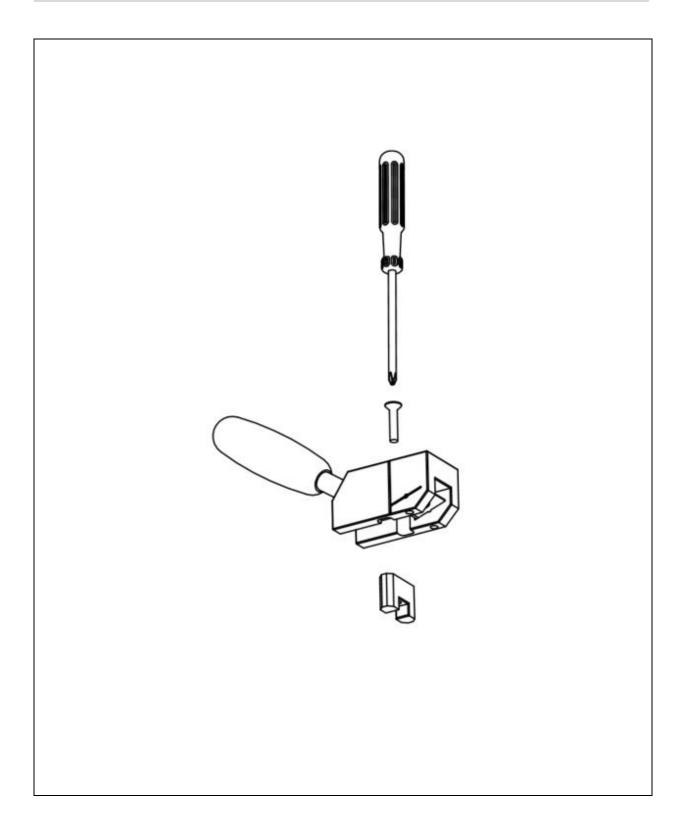


Page 2 of 7



### Step 1

IDENTIFY THE EMBOSSED LINES IN THE CABLE SHEATH PERPENDICULAR TO THE LATERAL STRENGTH MEMBERS.

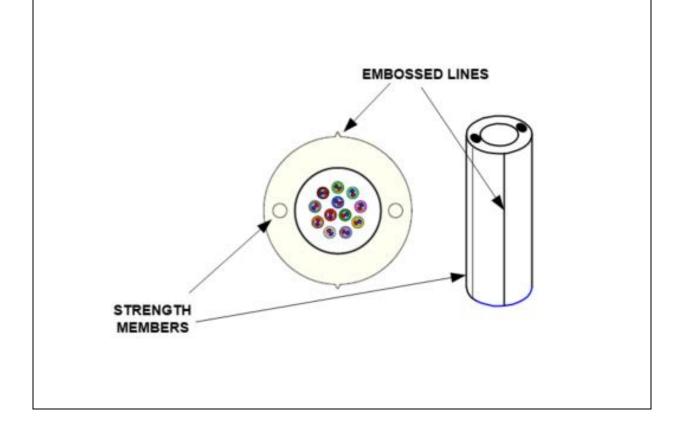

Page 3 of 7



#### Step 2


MARK THE CABLE TO DEFINE THE WINDOW CUT POSITION AND LENGTH.

LENGTH= 60MM

#### Step 3

KEEP THE CABLE STRAIGHT (IF POSIBLE ONTO THE WALL).

ALIGN THE TOOL SO THAT THE GROOVE IN THE TOOL IS SET OVER THE EMBOSSED LINES IN THE CABLE PERPENDICULAR TO THE STRENGTH MEMBERS.

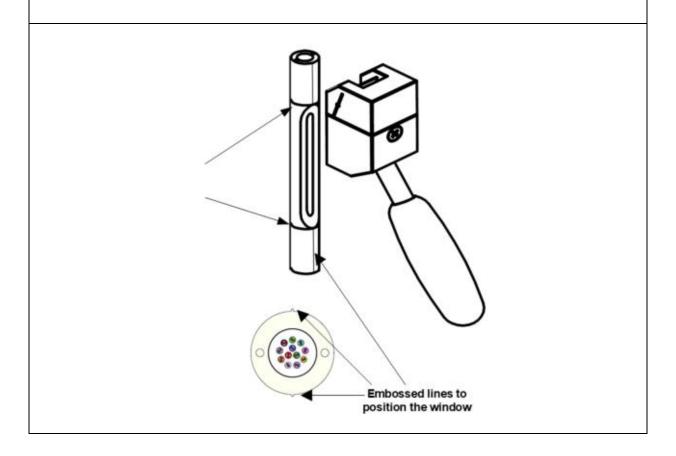




### Step 4


SET THE STRIPPING WITH THE BLADE EDGE ALIGNED WITH THE TOP MARK.

PRESS HARD THE STRIPPING TOOL ONTO THE CABLE AND PULL IT DOWN ALONG THE CABLE TO THE SECOND MARK.

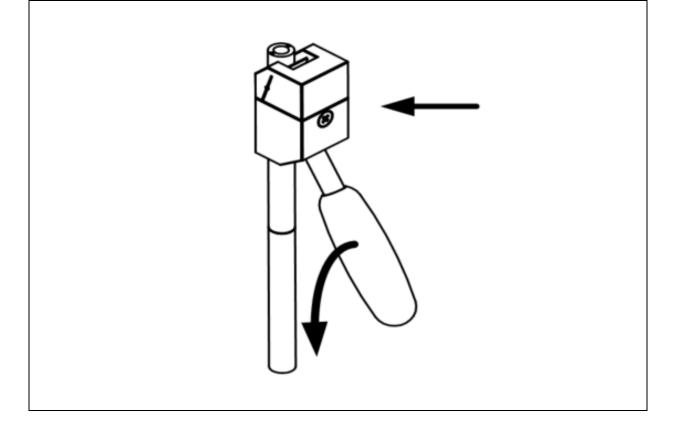

### Step 5

CLOSE TO THE SECOND MARK START TO LIFT THE STRIPPING TOOL HANDLE TO REMOVE IT FOR THE CABLE.

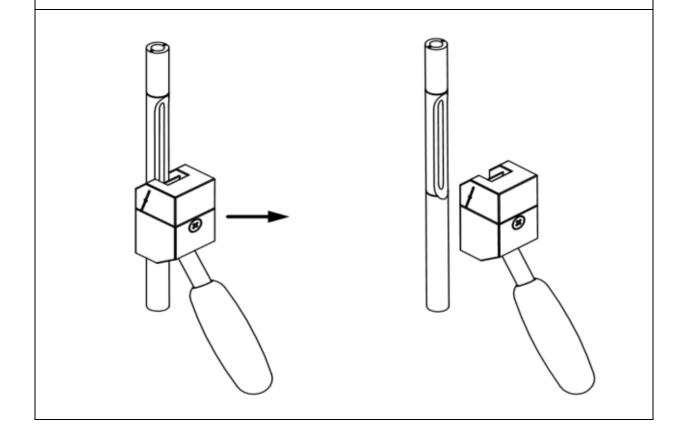

Page 6 of 7




#### **TO CHANGE THE BLADE:**

USE THE 2mm ALLEN KEY SUPPLIED IN THE KIT TO UNSCREW THE TWO ALLEN SCREWS AND REMOVE THE BLADE BY SLIDING IT OUT OF THE STRIPPING TOOL BODY.

### **SPARE BLADE KIT PRYSMIAN PART NUMBER:**

**XCPSC00569** – Set of spare blades (x10)



Copyright Prysmian Group - 2023 You may not copy, reprint, or reproduce in any form the content, either wholly or in part, of this Installation Guide, without the written permission of the copyright owner. Specifications are forproduct as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend the information within this Installation Guide without prior notice. This Installation Guide may include inaccuracies, omissions of content and of information and is not contractually valid unless specifically authorised by Prysmian Group. Property of Prysmian Group UK - Uncontrolled when printed Prysmian Cables & Systems Limited, Chickenhall Lane, Eastleigh, Hampshire, SO50 6YU, United Kingdom

PRYSMIAN HELPLINE: + 44 (0) 78161916333 connectivity.helpline@prysmiangroup.com

Page 7 of 7